


## **INTEGRA 16 mm heelproof entrance mat with carpet inserts**

**Integra 16 mm heel proof entrance mat** combines performance and elegance together with its unique interlocking tiles and high performance carpet inserts. Integra 16 mm is suitable for most demanding applications such as shopping centres, airports, subway stations and hotels.

Tiles have open grid yet heel proof construction. Distinctive of Integra tile is the combination of lamellas and carpet inserts creating alternating zones for scraping, cleaning and absorbing. Lamellas form the scraping and cleaning part of the tile and plain carpet inserts absorbing part of the tile.

Lamellas of tile remove grit and fibres of insert remove dust and absorb moisture. The steady rhythm of lamellas and plain carpet areas yields a unique design effect of Integra.

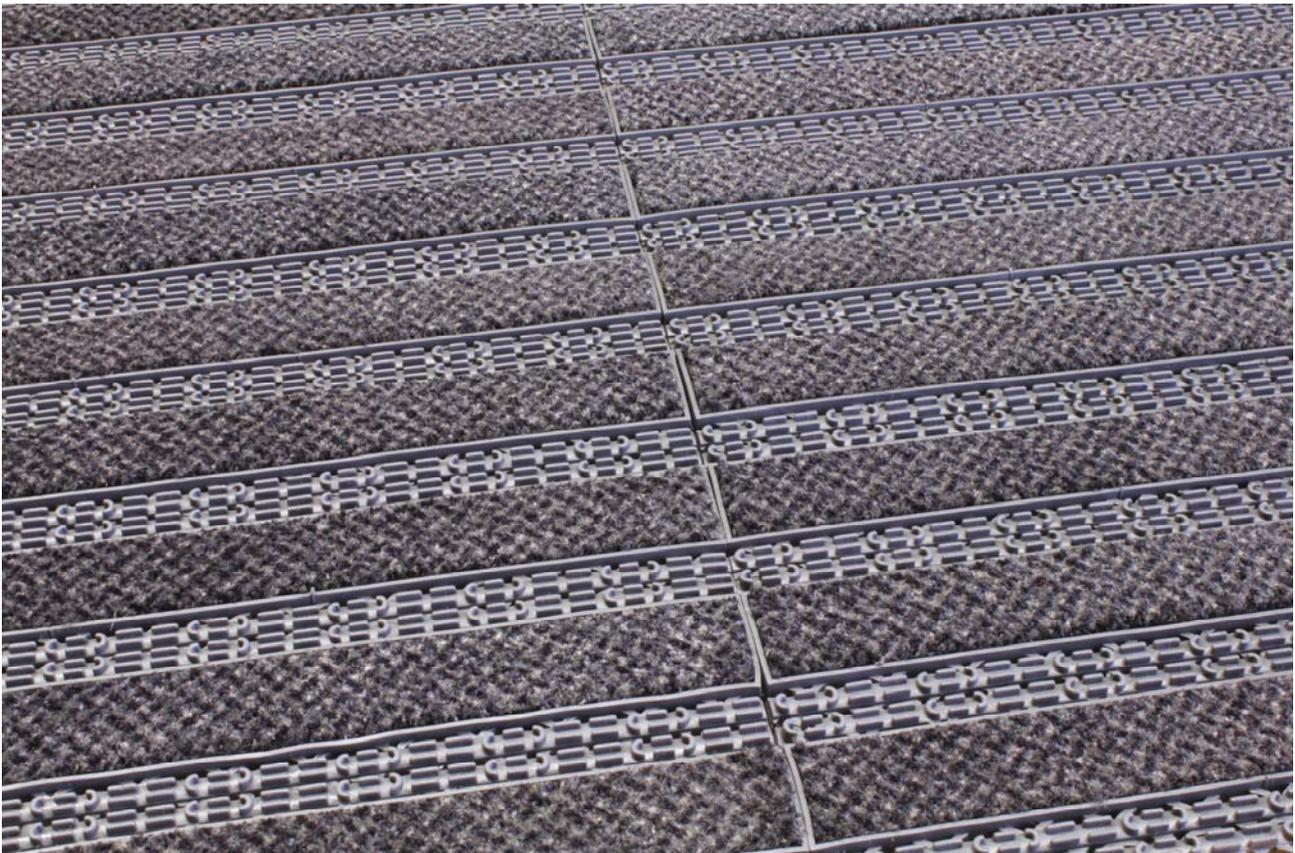

**Integra 16 mm tiles have open grid yet heel proof construction.**

## INTEGRA 16 mm

### Interlocking modular tiles

Integra 16 mm tiles are very easy to cut to size and shape. Tiles can be installed in minutes, without the use of special tools. Interlocking modular tiles allow you to create an entrance mat of any length and width.

### Easy maintenance


Integra entrance mat is inexpensive to clean by vacuum cleaning or hosing down. Integra is easy to roll up for maintenance. Dirt that falls through the mat can be simply vacuum cleaned from the floor underneath.

### Good drainage and non-slip surface

Integra 16 mm has slip resistant surface pattern and it offers maximum drainage. Open grid construction allows water to pass through the mat, providing safe and dry surface.



Combo 16 mm heel proof interlocking tile is fully compatible with the Integra 16 mm carpet tile.

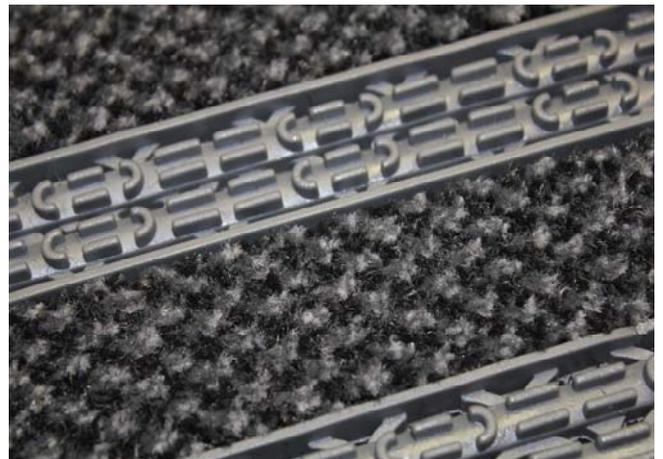

Insert colours are black and grey.

SPECIFICATIONS:	
Tile material:	UV-shielded vinyl. Resists most chemicals and oils.
Tile size:	400 x 140 mm
Packaging:	20 tiles / pkg (= 1,07 m <sup>2</sup> )
Height:	16 mm
Weight:	11 kg / m <sup>2</sup>
Tile colour:	Dark grey, black
Insert pile material:	100 % polyamide
Insert colours:	Black and grey
Temperature resistance:	-20°C - +70°C
Rolling load:	KfB dynamic test: 300 kg per wheel
Slip resistance:	DIN 51130: R11
Fire classification:	EN 13501: Bfl - s1
Emissions:	ISO 16000-9: TVOC class A+

### Muovihaka

Kuusimäentie 12, 01900 Nurmijärvi, FINLAND

Tel: +358 9 290 22 20

info@muovihaka.com

Fax: +358 9 250 48 07

www.muovihaka.com