


## Titan - entrance mat

Titan is interlocking modular entrance mat for demanding applications: public buildings, block of flats, office buildings, schools, kindergartens, shops, boutiques, banks etc.


Titan is extremely strong matting for a long life span in demanding indoor and outdoor conditions. A functional Titan entrance mat stops dirt, sand and debris in the entrance area.

Titan is durable modular mat, which can be assembled in a variety of designs and shapes.


Titan has open construction and non-slip and safe surface. Lightweight Titan is easy to handle and roll up for maintenance and cleaning.

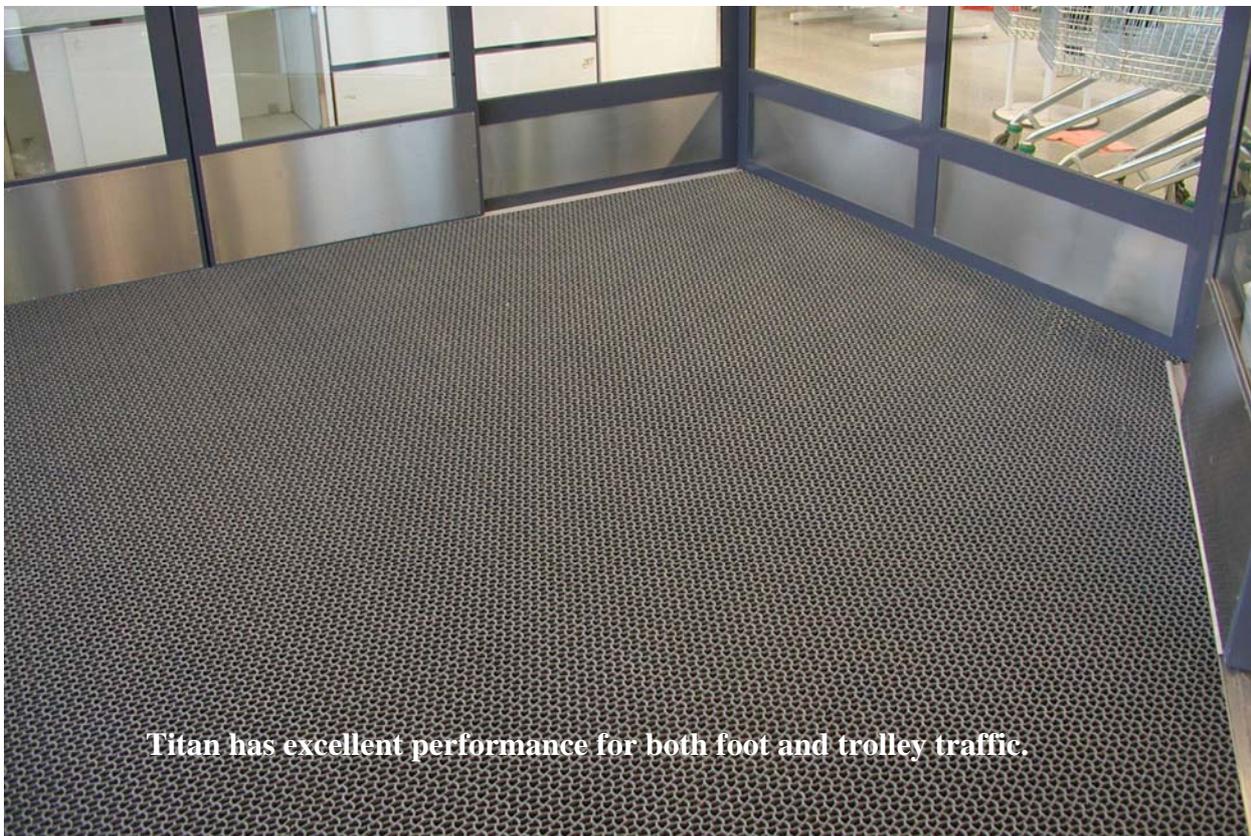

### Colours

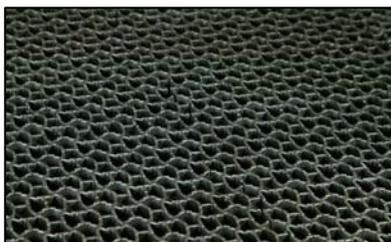

**Black**

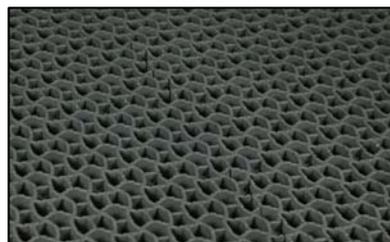

**Grey**



**Terracotta**

## Titan - entrance mat



Titan is strong matting for demanding conditions.

### Interlocking modular tiles

Titan tiles are very easy to cut to size and shape. Tiles can be installed in minutes, without the use of special tools. Interlocking modular tiles allow you to create an entrance mat of any length and width.

### Easy maintenance

Titan entrance mat is inexpensive to clean by vacuum cleaning or hosing down. Lightweight Titan matting is easy to roll up for maintenance. Dirt that falls through the mat can be simply vacuum cleaned from the floor underneath.

### Good drainage and non-slip surface

Titan has slip resistant surface pattern and it offers maximum drainage. Open grid construction allows water to pass through the mat, providing safe and dry surface.

### Accessories:

Titan plastic edging 16 mm x 300 cm  
Aluminium edging 16/20 mm x 300 cm  
Titan anchors 16 mm and 20 mm

SPECIFICATIONS:	
Material:	UV-resistant PVC/NBR. 100 % recyclable.
Tile size:	400 x 100 mm
Packaging:	24 tiles / pkg (= 0,96 m <sup>2</sup> )
Height:	16 mm ja 20 mm
Weight:	6,2 kg/m <sup>2</sup> ja 7,8 kg/m <sup>2</sup>
Colours:	Black, grey and terracotta.
Temperature resistance:	-35°C - +70°C
Rolling load:	KfB dynamic test: 300 kg per wheel
Slip resistance:	DIN 51130: R10
Fire classification:	EN 13501: Cfl - s1
Emissions:	ISO 16000-9: TVOC class A+



### Muovihaka

Kuusimäentie 12, 01900 Nurmijärvi, FINLAND  
Tel: +358 9 290 22 20 info@muovihaka.com  
Fax: +358 9 250 48 07 www.muovihaka.com