


# **Jaguar Carpet - entrance mat**


Jaguar Carpet entrance mat provides remarkable dirt and moisture removal and elegant appearance together with its interlocking tiles and high performance carpet inserts.

Jaguar Carpet is suitable for demanding applications: public buildings, block of flats, office buildings, schools, kindergartens, shops, boutiques, banks etc

Jaguar Carpet is performing best when used indoors or in weather protected areas.

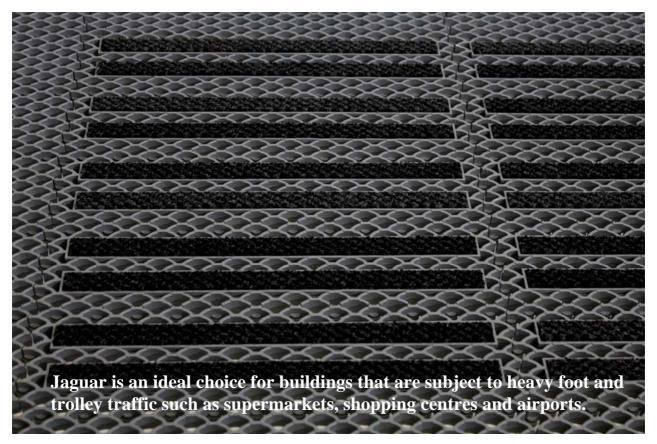









Kuusimäentie 12, 01900 Nurmijärvi, FINLAND Tel: +358 9 290 22 20 info@muovihaka.com Fax: +358 9 250 48 07 www.muovihaka.com





## **Jaguar Carpet - entrance mat**

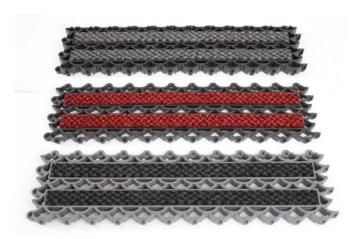






Jaguar Carpet has slip resistant surface pattern and it offers also maximum drainage. Open grid construction allows water to pass through the mat, providing safe and dry surface and reducing slip hazards.

### Easy maintenance

Jaguar Carpet entrance mat is inexpensive to clean by vacuum cleaning or hosing down. Lightweight Jaguar Carpet matting is easy to roll up for maintenance. Dirt that falls through the mat can be simply vacuum cleaned from the floor underneath.



Jaguar Carpet interlocking tile is fully compatible with the Jaguar plain tile.

### **Interlocking tiles**

Interlocking modular tiles allow you to create an entrance mat of any length and width. Tiles are very easy to cut to size and shape. Jaguar tiles can be installed in minutes, without the use of special tools.

#### Accessories:

Jaguar soft edging 12 mm x 40 cm Jaguar alu edging 9/12 mm x 300 cm Jaguar alu edging 16/20 mm x 300 cm Jaguar anchors 12, 16 and 20 mm

SPECIFICATIONS:	
Tile material:	PVC/NBR, UV-shielded. Resists most chemicals and oils.
Tile size:	40 x 10 cm
Packaging:	24 tiles / pkg (= 0,96 m²)
Height:	12 mm, 16 mm, 20 mm and 25 mm
Weight:	6.9 kg/m <sup>2</sup> 9.9 kg/m <sup>2</sup> 11.5 kg/m <sup>2</sup> 15.0 kg/m <sup>2</sup>
Tile colour:	Dark grey, black
Insert pile material:	100 % polyamide
Insert colours:	Black, grey and red
Temperature resistance:	-35°C - +70°C



Kuusimäentie 12, 01900 Nurmijärvi, FINLAND Tel: +358 9 290 22 20 info@muovihaka.com Fax: +358 9 250 48 07 www.muovihaka.com

