


### **SILVER RIB**

# heelproof entrance mat with ribbed carpet insert

**Silver Rib heel proof entrance mat** is a heavy duty entrance mat consisting of interlocking tiles with ribbed carpet inserts. Polypropylene needle punched ribs have excellent scraping properties to remove dirt, grit and moisture from shoes. Silver Rib is suitable for light to medium traffic in private and public areas.

Parallel lines of ribbed polypropylene needle fibers trap dirt and moisture. The channels between the ribs conceal the dirt until cleaning time. Silver Rib fibers offer long wear, color fastness and easy maintenance.

High grade special vinyl/NBR tiles provide impact sound insulation and slip resistance.

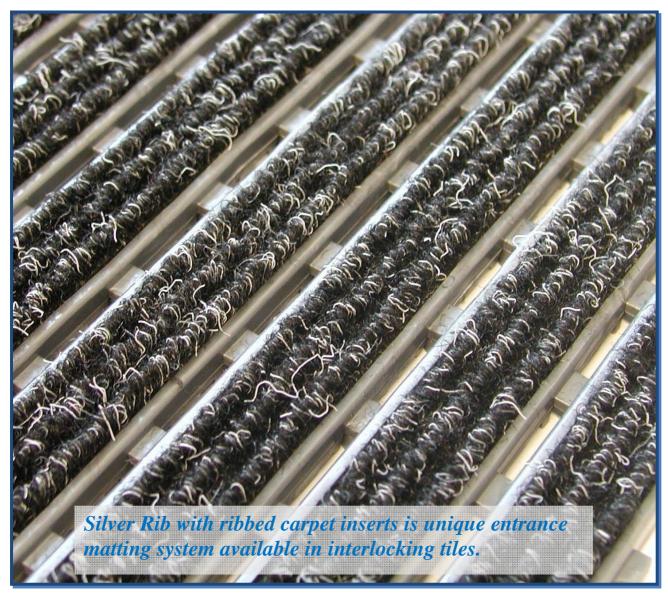



Kuusimäentie 12, 01900 Nurmijärvi, FINLAND Tel: +358 9 290 22 20 info@muovihaka.com Fax: +358 9 250 48 07 www.muovihaka.com





## **SILVER RIB**

#### **Interlocking modular tiles**

Silver Rib vinyl/NBR tiles are very easy to cut to size and shape. Tiles can be installed in minutes, without the use of special tools. Interlocking modular tiles allow you to create an entrance mat of any length and width.

#### Easy maintenance

Simply vacuum surface and floor below. Silver Rib is easy to roll up for maintenance. Dirt that falls through the mat can be simply vacuum cleaned from the floor underneath. For extreme soiling hose down with a high pressure washer.

#### Good drainage and non-slip surface

Silver Rib has slip resistant surface and it offers excellent drainage. Open construction allows water to pass through the mat, providing safe and dry surface.



### Ribbed pattern and needle punch fibers work vigorously to remove dirt and moisture.

SPECIFICATIONS:	
Tile material:	UV-resistant vinyl/NBR. Resists most chemicals and oils.
Pile yarn material:	Polypropylene
Tile size:	38,5 x 12,4 cm
Packaging:	20 tiles / pkg (= 0,95 m <sup>2</sup> )
Height:	17 mm
Weight:	6,3 kg / m²
Pile yarn colour:	Graphite
Tile colour:	Aluminium
Temperature resistance:	-35°C - +70°C
Rolling load:	KfB dynamic test: 300 kg per wheel
Slip resistance:	DIN 51130: R11





Kuusimäentie 12, 01900 Nurmijärvi, FINLAND Tel: +358 9 290 22 20 info@muovihaka.com Fax: +358 9 250 48 07 www.muovihaka.com

