

## COMBO 9 mm - heel proof entrance mat

Combo 9 mm is heavy duty primary entrance mat for all high and extreme traffic conditions including shopping centres, public buildings, block of flats, office buildings and schools. It is durable heel proof interlocking modular mat for both internal and external applications. Combo stops dirt, sand and debris in the entrance area before they enter the building.

When combined with Combo 16 mm entrance mat, Combo 9 mm leaves recessed area for carpets – and creates a unique concept – Combo Matwell system.

**Combo 9 mm and Combo16 mm -  
unique Combo Matwell system !**

**Combo 16 mm**



**Combo 9 mm**

**7 mm**

*The Combo Matwell system works with most types of  
carpet inserts, dust control mats and logo mats.*



*The Combo 16mm entrance mat interlocking  
tile is fully compatible with the Combo 9 mm  
- a simple and cost effective matwell solution.*

Combo Matwell system is an exciting new concept that allows you create a recessed matwell without the complication or cost of having to cut a matwell into the floor. It is ideal for existing buildings without a dedicated matwell.

Combo 9 mm works with Combo 16mm entrance mat to form a ready made matwell into which mats can be placed. Combo 9 mm leaves a 7 mm recess for mat or carpet inserts, when combined with the Combo 16 mm entrance mat. The recessed area can take most types of carpet inserts, dust control mats and logo mats.


## COMBO 9 mm - heel proof entrance mat

### Interlocking modular tiles

Combo interlocking tiles can be installed in minutes without the use of specialised equipment. The modular tiles allow for the creation of a matwell without the complication or cost of having to cut a matwell into the floor.

### Easy maintenance

The Combo entrance matting is simple to maintain by regular vacuuming and hosing (regular hose or power washer). The Combo collection is simple to roll up for cleaning purposes. Any dirt that falls through the mat can be vacuumed or hosed once the matting has been removed.

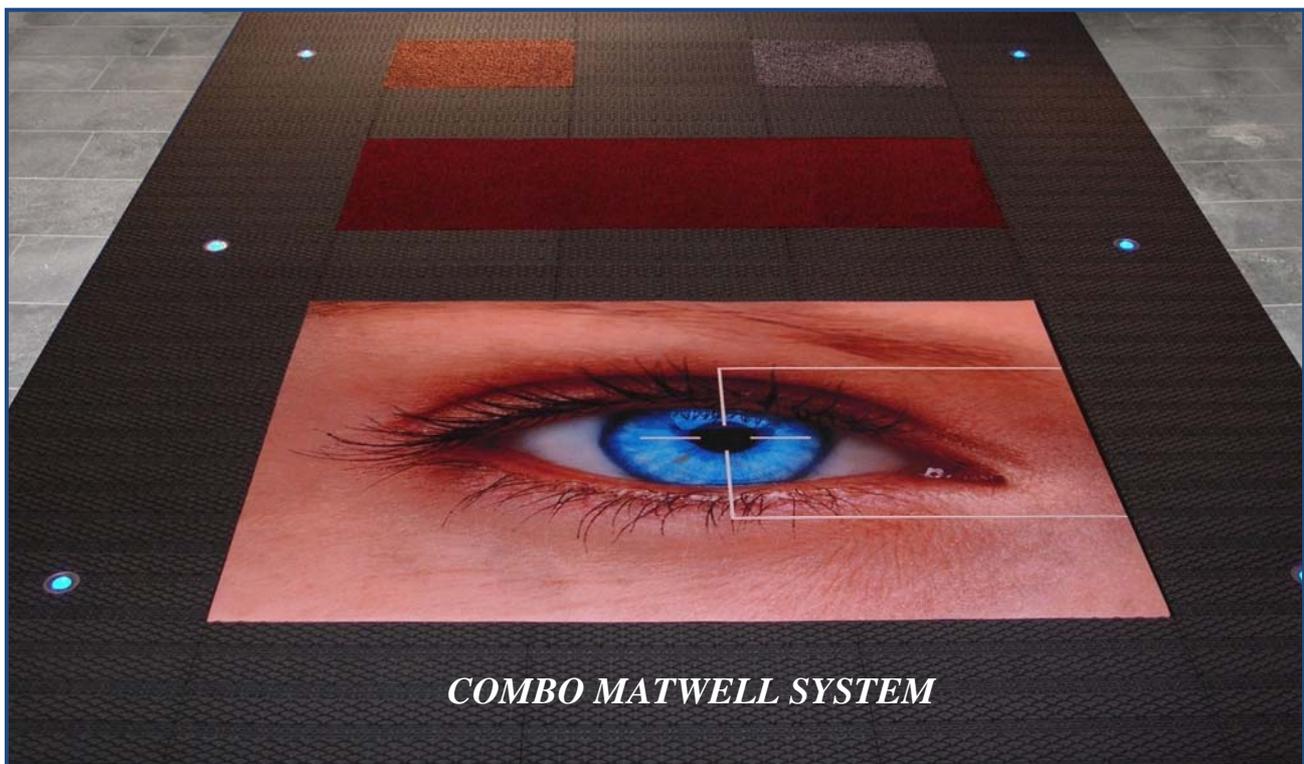

### Installation of Carpet Inserts and Logo Mats

Combo Matwell system (Combo 9 mm and Combo 16 mm entrance matting) leaves a perfect 7 mm matwell into which carpet inserts or mats can be laid. The carpet insert or mat can be loose laid into the matwell or more firmly held in place using double sided tape or velcro.

SPECIFICATIONS:	
Material:	UV-resistant vinyl/NBR. Resist most chemicals and oils. 100 % recyclable.
Tile size:	400 x 140 mm
Packaging:	36 tiles / pkg (= 2 m <sup>2</sup> )
Height:	9 mm
Weight:	4,7 kg / m <sup>2</sup>
Colour	Dark grey
Temperature resistance:	-35°C - +70°C
Emissions:	ISO 16000-9: TVOC class A+



### Muovihaka

Kuusimäentie 12, 01900 Nurmijärvi, FINLAND  
Tel: +358 9 290 22 20 info@muovihaka.com  
Fax: +358 9 250 48 07 www.muovihaka.com