


Technical Datasheet

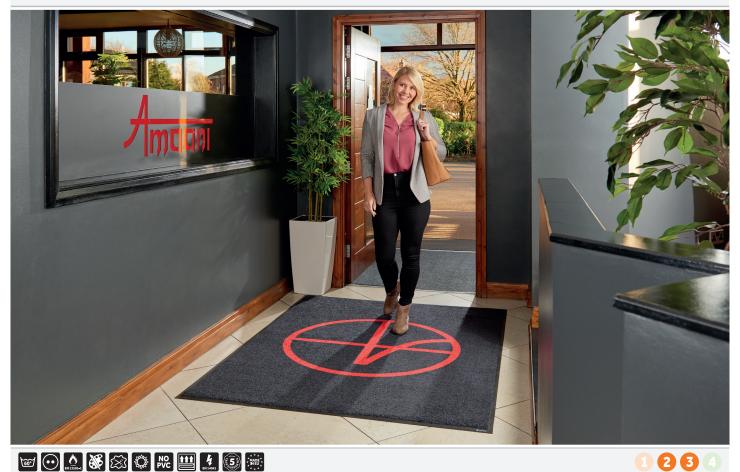

Product: Jet-Print

Customs tariff number: 57032999

Product details: » Custom designs

 $\ensuremath{\text{\textbf{y}}}$ Stops dirt and moisture » Durable nylon surface

» Special colours going by Pantone, HKS or RAL possible for a surcharge

» Special shapes possible » Skid resistant rubber back

» PVC-free

» Suitable for underfloor heating » 5 year Manufacturers Guarantee*

» Made in Europe

Burning behaviour: EN 13501-1 / Cfl-s1

Static electrical propensity: FN 14041 Antistatic

Slip resistance: NFSI High-Traction

Total mat weight: 2.48 kg/sqm

Overall height: approx. 9 mm

Dirt absorption: 600 g/sqm Moisture absorption: 3 - 4 l/sqm

Application areas: » Indoor placement

» Entrances » Corporate identity

» Point of Sale

» Any marketing message

Standard widths with borders: 60 cm, 75 cm, 85 cm, 115 cm,

150 cm and 200 cm

Standard widths 3 cm smaller than for mats with borders without borders:

(e.g. 57 cm)

Standard lengths: all lengths up to 700 cm

Colouration: Chromojet printing process

Pile: 100 % High-Twist Nylon (HTN) Polyamide 6.6

Pile height: approx. 8 mm

Pile weight: without substrate: 680 g/sqm with substrate: 780 g/sqm

Backing: 100 % Nitrile rubber

Available with kleeted or smooth backing

Rubber thickness: 1.40 mm Rubber weight: 1.70 kg/sqm Border width: 20 mm

Available with or without borders **Border thickness:**

2.40 mm

Cleaning: » Washable up to 60 °C

(Washing is not recommended for mats without reinforced edges when rubber backing is less than 1.8 mm thick)

» Tumble dry up to 60 °C

Colours:

